


## ALISTAIR Wooden House

by Maxime BRARD / 2015-07-03 14:18:52 / France / 16421 / FR

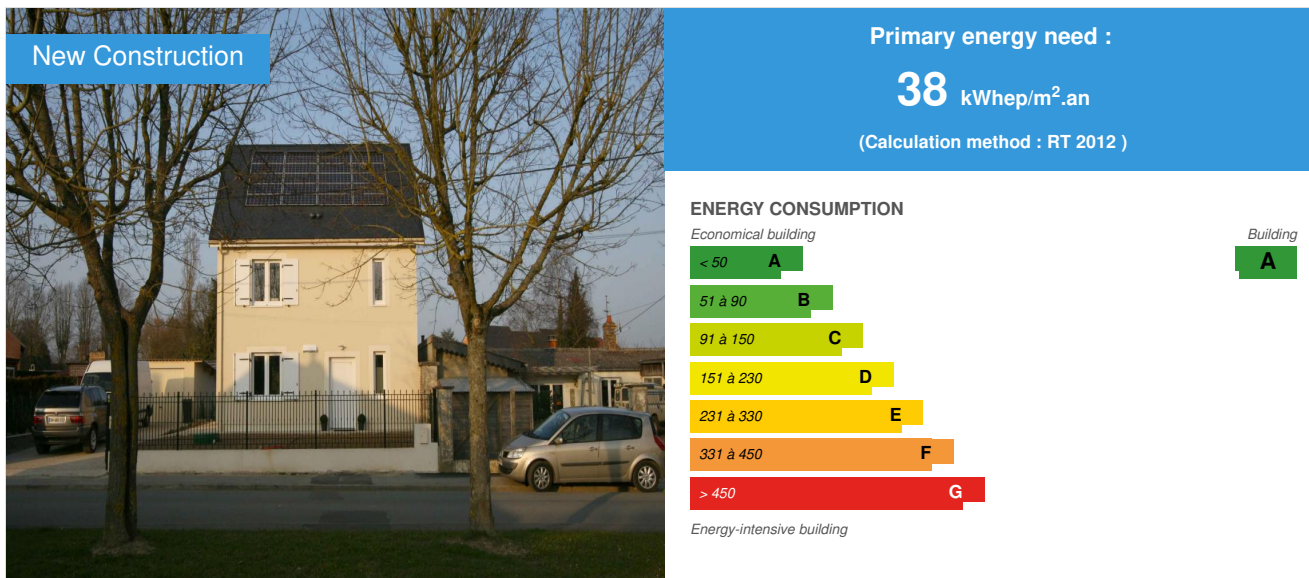

**Building Type** : Isolated or semi-detached house  
**Construction Year** : 2014  
**Delivery year** : 2014  
**Address 1 - street** : 6 rue des vignes 60000 TILLE, France  
**Climate zone** : [Cfb] Marine Mild Winter, warm summer, no dry season.

**Net Floor Area** : 80 m<sup>2</sup>  
**Construction/refurbishment cost** : 115 000 €  
**Number of Dwelling** : 1 Dwelling  
**Cost/m<sup>2</sup>** : 1437.5 €/m<sup>2</sup>

Certifications :



### General information

This house has been certified Positive Energy building (Effinergie Bepos) for its model of individual wood frame house "Alistair". The first in France, any other wooden house has obtained this certification.

Alistair house is the **house of the future, to live today**: a family home with 3 bedrooms, accessible at affordable cost, which offers its inhabitants a total **energy independence** and a much higher comfort than the other houses offered in the market.

An ultra-demanding certification that prefigures the future thermal regulation (RT 2020), Bepos Effinergie certification attests the quality and effectiveness of technical solutions chosen by Ecolocost.

Alistair house is characterized by several specific features:

- 80m<sup>2</sup> house on two levels, specifically adapted to first-time home demand (seulement 50 m<sup>2</sup> footprint)
- **Negative final energy consumption** of 42.1kWh ep / m<sup>2</sup> per year

- The determination of not being dependent of **any fossil energy** (oil, naturalgas, coal, etc.)
- The self-consumption is favoured with **photovoltaic panels 100% made in France**
- Powerful equipment (ECS thermodynamics, VMC double flow, A +++ appliances, LED lighting ...)
- Lowered needs emphasizing the building envelope
- A wood frame structure with triple insulation 40 cm
- Triple glazed windows
- No radiator, useless

According to studies and tests currently conducted, this house has a real **energy consumption for all uses of the order of 40-50 € / month** for a photovoltaic production estimated at 125 € / month. The balance sheet is largely surplus.

## Sustainable development approach of the project owner

We design and build for real estate development quality homes, conform to positive energy standard (BEPOS) and at an affordable cost made possible by the standardization of our products. The timber frame particularly has advantages such as the ability to be easily industrialized, machined and conveyed, with a reduced manufacturing cost in the production of grouped units.

Our housing concept was born of a mature reflection on the conditions needed to create good quality housing. Our bias: reduce what can be, as the surface areas without, compromising on quality and livability of housing.

Our demand for quality allows us to offer positive energy standard (BEPOS) housing with implementation of better finishes than conventional standards, but also better in the regulatory requirements.

These houses are for property developers and private investors wishing to build several housing.

## Architectural description

Our bias was to reach a positive energy homemade (future RT 2020) while retaining the look of a traditional house. The timber frame or performance are only ways that to thermal excellence with an affordable cost, but the exterior and interior architectural appearance is identical to what is done today in order to protect the environment and prevent disruption to end- user wishes .

In addition, we took care of traffic and internal layout to make this 80m2 house as comfortable as a home that would be 10 or 20 m2 larger.

## Building users opinion

Occupants are delighted, it costs nothing and the feeling about interior comfort related to wood is very pleasant. The noise level is high performance (it is located 150m from Beauvais Airport and we hear no noise).

The air quality is truly different thanks to the double flow.

Interior noise are greatly reduced with thick walls of 15cm at screeds on each level

Occupants are all satisfied in every point.

## If you had to do it again?

We have to evolve and we believe it is more relevant to build our homes in "villages"because we can pool the cost of production and heating thanks to the common pellet wood boilers of which the cost becomes affordable from 20 units.

## See more details about this project

<http://www.ecolocost.com>

<http://www.batiactu.com/edito/des-maisons-ecologiques-et-low-cost-41043.php>

<https://youtu.be/PJ1RxEExNGE>

## Stakeholders

### Stakeholders

Function : Construction company  
ecolocost

maxime brard

<http://www.ecolocost.com>

### Contracting method

General Contractor

### Type of market

## Energy

### Energy consumption

Primary energy need : 38,00 kWh<sub>ep</sub>/m<sup>2</sup>.an

Primary energy need for standard building : 70,00 kWh<sub>ep</sub>/m<sup>2</sup>.an

Calculation method : RT 2012

CEEB : 0.0003

Breakdown for energy consumption : Heating: 11.3 ECS: 18.4 Lighting 4.1 Ventilation: 10 local electricity production: 85.8

### Real final energy consumption

Final Energy : 43,80 kWh<sub>ef</sub>/m<sup>2</sup>.an

### Envelope performance

Envelope U-Value : 0,11 W.m<sup>-2</sup>.K<sup>-1</sup>

More information :

Our walls are made of a wooden frame of 180 mm coated on each side with a Fermacell plate. On the outer wall, we add a high-density insulation in mineral wool covered with a film and a grip coating for receiving the plaster. Inside the Fermacell plate is covered with the vapor barrier film, a technical bulkhead of 50 mm filled with new mineral wool and a BA13 plaster plate to directly receive the finishing paint. Performance (U<sub>e</sub>) of our walls and our floors is 0.1053 W / m<sup>2</sup>. ° C.

Indicator : EN 13829 - q50 » (en m<sup>3</sup>/h.m<sup>3</sup>)

Air Tightness Value : 0,25

### More information

all information is <http://www.observatoirebbc.org> sheet: MI60N-6FHHE

## Renewables & systems

### Systems

Heating system :

- Wood boiler

Hot water system :

- Heat pump

Cooling system :

- No cooling system

Ventilation system :

- Double flow heat exchanger

Renewable systems :

- Solar photovoltaic
- Wood boiler

Renewable energy production : 150,00 %

Other information on HVAC :

ECS: Ball thermodynamics - PAC air / water - Insulation of inlet and outlet with 5 cm of glass wool and aluminum foil Heating: pellet stove sealed with room sensor - Nominal power: 6.1 kilowatts

Area: 38,11m<sup>2</sup> - Peak power: 5,48kW<sub>c</sub> - Production: Injected 100% on the network

## Environment

### Urban environment

The direct environment of this model home is very special because the house is located less than 200m from the slopes of Beauvais-Tille Airport. This nuisance was interesting to check the acoustic comfort of the home. This set apart, the idea was also to successfully integrate in a classic suburban urban BEPOS a house without this one does come to break with the rest of the houses. This house is visually similar to other elms solar panels integrated into the roof.

## Products

### Product

Ecocost

Ecocost


+33 6 43 78 25 43 - mxb@ecocost.com

<http://www.ecocost.com/>

Product category : Structural work / Structure - Masonry - Facade

Our technology is based on the principles of passive house (Psi = -0.053). The insulation of the slab is achieved with panels of extruded polystyrene (XPS). The qualities of this insulation are: - Very high mechanical resistance - Rot-proof and unaffected by water - No impairment of thermal and mechanical performance over time Performance (Ue) foundations of 0.1110 W / m2. ° C. It also allows us to use only a small amount of concrete (less than 10 m3 per house) poured inside the formwork XPS. The advantage of this method is to have a perfectly insulated slab that can be easily recycled during demolition leaving no pollution on the ground (no dust or rubble mixed with soil). To improve insulation of the floor, we incorporate 5cm insulation covered with a 35 mm cap and a tile of 15 mm. This method also has the advantage of facilitating the application of accessibility regulations (PMR standards - Disability Access). During installation, the wall is embedded accurately into the sill attached to the slab and the joint of the XPS insulation walls. Our walls are made of a wooden frame of 180 mm coated on each side with a Fermacell plate. On the outer wall, we add a high-density insulation in mineral wool covered with a film and a grip coating for receiving the plaster. Inside the Fermacell plate is covered with the vapor barrier film, a technical bulkhead of 50 mm filled with new mineral wool and a BA13 plaster plate to directly receive the finishing paint. Performance (Ue) of our walls and our floors is 0.1053 W / m2. ° C.

xxxx

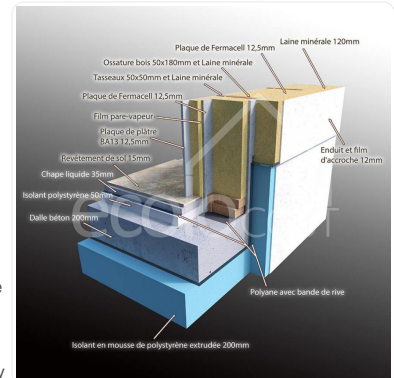

## Costs

### Construction and exploitation costs

Renewable energy systems cost : 15 000,00 €

Total cost of the building : 139 €

## Health and comfort

### Comfort

Health & comfort : Objective summer comfort Tic Project: 26 ° C - Tic Reference: 30.7 ° C ° C

## Carbon

### GHG emissions

GHG in use : 1,00 KgCO<sub>2</sub>/m<sup>2</sup>/an

Building lifetime : 80,00 année(s)

### Life Cycle Analysis

## Contest

## Reasons for participating in the competition(s)

- **Économique:** Cette maison est réalisable dans des délais exceptionnellement courts grâce à la filière sèche, ne mobilisant les équipes que pour un temps limité : la mise hors d'eau hors d'air se déroule en une seule journée et les délais de construction sont réduits (entre 6 et 12 semaines) = moins d'énergie et de déchets.
- **De qualité:** Parce que réaliser des économies de construction ne signifie pas nécessairement sacrifier la qualité, les équipements et les finitions de la maison Alistair garantissent un confort avec des équipements techniques très haut de gamme pour économiser les besoins d'énergie.
- **Accessible:** La maison Alistair a été conçue pour pouvoir être produite en série, à grande échelle en logements individuels ou groupés, privés ou publics. C'est la raison pour laquelle Ecolocost est en mesure de proposer un rapport qualité/prix imbattable, grâce à des process inspirés de l'exigence de qualité et d'innovation de l'industrie automobile en mobilisant mois d'énergie pour la produire.

Maisons Alistair ou Andrew, 80 m2 clefs en main : 115 000€HT (conforme RT 2012), option panneaux solaire -poêle à bois : 15 000€HT.

## Building candidate in the category



Bâtiment zéro énergie

