
CONSTRUCTION21

Condominium Les Vignes

by Benjamin Le Guennec / (1) 2019-02-21 14:26:41 / France / (2) 4620 / 🍽 FR

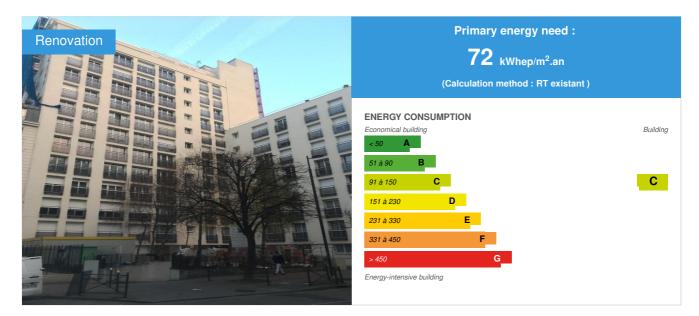

Building Type : Collective housing < 50m Construction Year : 1973 Delivery year : 2019 Address 1 - street : 51 rue Jean Bleuzen 92170 VANVES, France Climate zone : [Cfc] Marine Cool Winter & summer- Mild with no dry season.

Net Floor Area : 5 282 m² SHON Construction/refurbishment cost : 1 436 270 € Cost/m2 : 271.92 €/m²

General information

In 2014, aware of the renovation work to be done on their building, the union council decided to carry out an energy audit. Oriented by GPSO, he is moving towards a global audit of their residence.

Following this audit by Reanova, the condominium decided to carry out a design mission for one of the scenarios.

This scenario includes:

- the thermal insulation of the facades from the outside
- insulation of low floors
- the establishment of a humidity-sensitive type B ventilation
- the passage of fuel oil to gas
- the installation of thermostatic faucets
- the replacement of the original private joinery
- · lighting common areas

With an energy gain of 58%.

After the design, the condominium voted the completion of the work in 2017.

It is a global and ambitious renovation project, with thermal insulation of the building (external walls, floor, windows) but also a renovation of the systems

(boiler room, terminal regulation, ventilation). This works can achieve up to 58% energy savings.

The approach initiated by the condominium is also exemplary. From the energy audit to the works. A thoughtful and coherent approach from the beginning to the end.

Consult the map of renovated condominiums on the Paris metropolis https://paris.coachcopro.com/pages/carte-des-coproprietes-renovees

Sustainable development approach of the project owner

For many years, the condominium complained of problems of air leakage around windows and difficult heat regulation. As part of the **energy and architectural audit** of the condominium, a survey of the occupants was carried out in 2014, identifying the precise expectations of the condominium on the renovation of their building. It confirmed the strong expectations concerning the **improvement of the thermal comfort**, but also the **control of the consumptions of energy**.

In October 2015, an extraordinary general assembly voted on the design mission and retained the most ambitious scenario proposed following the energy audit, to reach the **BBC renovation** (building low energy consumption) level, set at 104 kWh / m² / year. in Ile de France. The result should eventually reach 97 kWh / m² / year, which makes the condominium class E to class C, allowing a saving of nearly 60% on energy consumption.

Architectural description

The condominium Les Vignes is composed of a building (R + 13) and 58 dwellings. It dates from 1963.

The works carried out are

- Thermal insulation from the outside with 14 cm of rockwool
- Insulation of low floor with flocking of 12 cm mineral wool
- Replacement of joinery in single glazing by double glazed PVC joinery
- Installation of a gas condensing boiler instead of a fuel boiler
- Installation of a humidity-controlled type B ventilation
- Modernization of the lighting of common areas (LED + detectors)

See more details about this project

Chttps://gpsoe.coachcopro.com/fiche-de-site/7063eda7-f49c-45de-a11a-b152a83bef40

Stakeholders

Contractor

Name : Copropriété Les Vignes

Construction Manager

Stakeholders

Function : Thermal consultancy agency Pouget consultant

Thttp://www.pouget-consultants.eu/

Function : Company ARCTCE

C https://www.arctce.fr/offline/ Lot facades

Function : Company

Norba

https://www.norba-menuiserie.com/ Lot joineries

Function : Company Engie Thttp://www.engie.fr/ Heating batch

Function : Company AIRTEC

Lot ventilation

Type of market

Global performance contract

Energy

Energy consumption

Primary energy need : 72,00 kWhep/m².an Primary energy need for standard building : 93,00 kWhep/m².an Calculation method : RT existant Breakdown for energy consumption : Heating: 59% Domestic hot water: 36% Cooling: 0% Lighting of the common parts: 2% Auxiliaries: 3% Initial consumption : 222,00 kWhep/m².an

Real final energy consumption

Final Energy : 85,00 kWhef/m².an

Envelope performance

Envelope U-Value : 0,84 W.m⁻².K⁻¹ Indicator : n50

Renewables & systems

Systems

Heating system :

Condensing gas boiler

Hot water system :

• Condensing gas boiler

Cooling system :

No cooling system

Ventilation system :

• Humidity sensitive Air Handling Unit (Hygro B

Renewable systems :

• No renewable energy systems

Environment

Urban environment

Dense urban environment.

Products

Product

Joinery

TRYBA

Product category : Second œuvre / Menuiseries extérieures Joinery PVC double glazing

ECOROCK DUO insulation

ROCKWOOL

Product category : Gros œuvre / Structure, maçonnerie, façade Rockwool







vmc hygro B BAHIA

Ventilation ALDES

Heating Prduction

ATLANTIC GUILLOT

Product category : Génie climatique, électricité / Chauffage, eau chaude gas boiler with condesation

Product category : Génie climatique, électricité / Ventilation, rafraîchissement



Heating regulation

DANFOSS

Product category : Génie climatique, électricité / Chauffage, eau chaude thermostatic faucets

Costs

Construction and exploitation costs

Cost of studies : 63 841 € Total cost of the building : 1 428 530 € Subsidies : 260 119 €

Health and comfort

Comfort

Health & comfort :

Work on the insulation of walls and joinery has, among other things, increase the thermal comfort of occupants by eliminating the phenomenon of cold walls in winter and limiting overheating in summer. In addition, the improvement of the ventilation makes it possible to ensure a renewal of air all the year, that further improves the comfort of use of the building.

Carbon

GHG emissions

GHG in use : 23,00 KgCO₂/m²/an

Contest


Reasons for participating in the competition(s)

It is a global and ambitious renovation project, with thermal insulation of the building (external walls, floor, windows) but also a renovation of the systems (boiler room, terminal regulation, ventilation). This works can achieve up to 58% energy savings.

The approach initiated by the condominium is also exemplary. From the energy audit to the works. A thoughtful and coherent approach from the beginning to the



Building candidate in the category

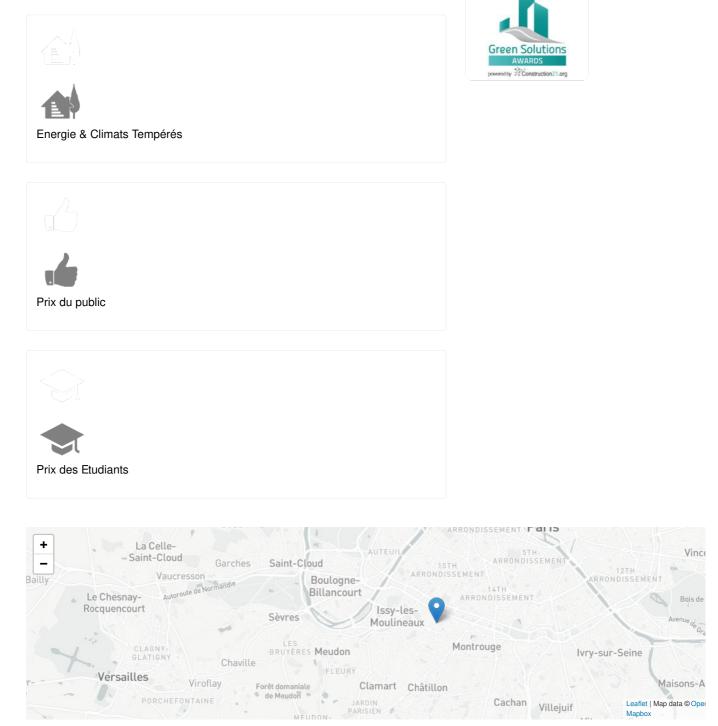

Date Export : 20230331125410

end.