
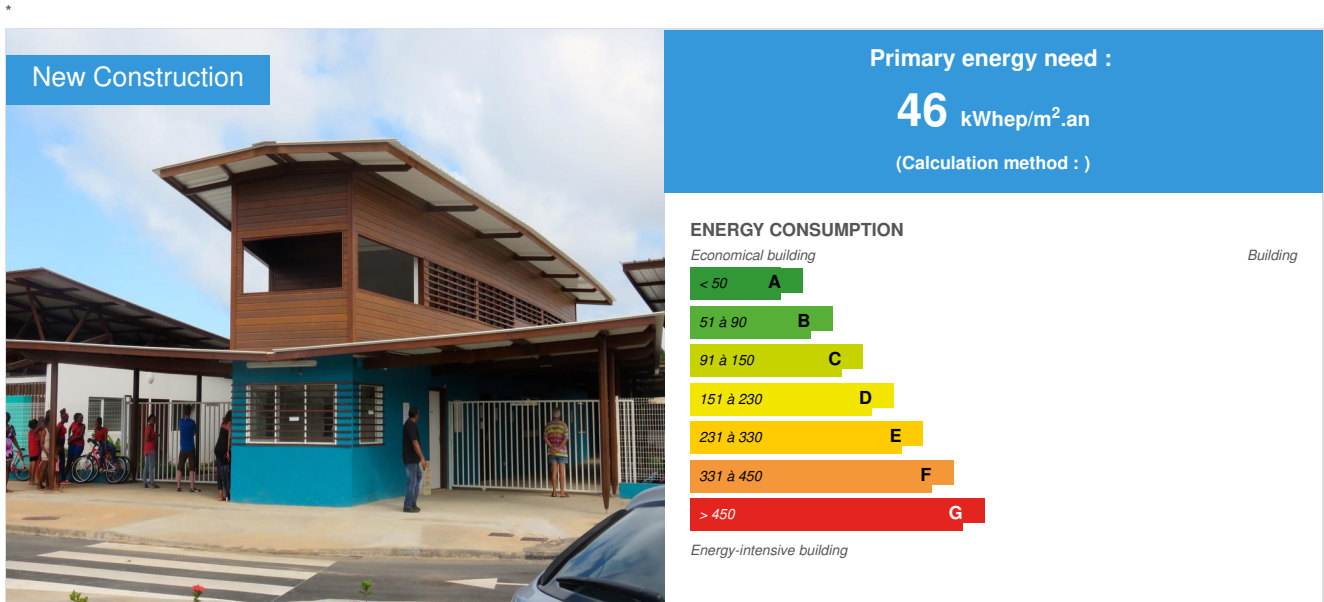


Sainte Agathe School Group

by [Jérémy FERNANDEZ-BILBAO](#) / 2017-03-13 12:43:15 / France / 9588 / 



Building Type : Preschool, kindergarten, nursery
Construction Year : 2012
Delivery year : 2012
Address 1 - street : 97355 MACOURIA, GUYANE, France
Climate zone : [Af] Tropical Wet. No dry season.

Net Floor Area : 3 064 m²
Construction/refurbishment cost : 4 000 000 €
Number of Children : 16 Children
Cost/m2 : 1305.48 €/m²

General information

Sustainable development approach of the project owner

QEA Approach

Architectural description

Construction of a school group of 16 classes

Stakeholders

Stakeholders

Function : Designer

Boa Architecture

Jérémy Fernandez

Co-contracting architect

Function : Designer

AB Architecture

André Barrat

Architect

Contracting method

Separate batches

Type of market

Table 'c21_maroc.rex_market_type' doesn't exist

Energy

Energy consumption

Primary energy need : 46,00 kWh_{ep}/m².an

Primary energy need for standard building : 76,00 kWh_{ep}/m².an

Calculation method :

Breakdown for energy consumption : Air conditioning 6% Water Solar Hot Water Solar: 3% Ventilation: 0% Interior lighting: 14% Outdoor lighting: 39% Air
Brewers: 18% Meal preparation: 11% Computing: 2% Other: 8%

Real final energy consumption

Final Energy : 24,00 kWh_{ef}/m².an

Envelope performance

More information :

Solar Factor

Roofing: 2.4%

Walls: 2.6% - 4.9%

Opening: 25%

Renewables & systems

Systems

Heating system :

- No heating system

Hot water system :

- Solar Thermal

Cooling system :

- Others

Ventilation system :

- Natural ventilation

Renewable systems :

- Solar Thermal

Renewable energy production : 9,00 %

Other information on HVAC :

2 splits

Environment

Urban environment

The school group is located in the neighborhood of saint agathe in Macouria, it is located in a subdivision composed of single houses in rez of road and bordered by a propri.

Products

Product

Wood of Guyana

CBE

sec.cbe973@wanadoo.fr

<http://www.cbe.com>

Product category : Gros œuvre / Charpente, couverture, étanchéité

Realization of all the frameworks. Guyana wood is PEFC certified and several species are naturally sustainable, including the Angelica used on this project.

Guyana wood is a high-quality, locally produced material.



Costs

Carbon

GHG emissions


GHG in use : 28 000,00 KgCO₂/m²/an

Life Cycle Analysis

Eco-design material : PEFC certified local wood


Contest

Building candidate in the category

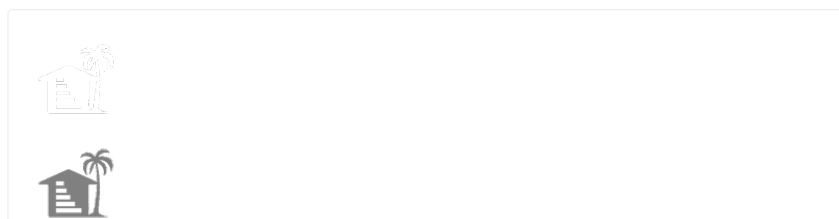



Coup de Cœur des Internautes

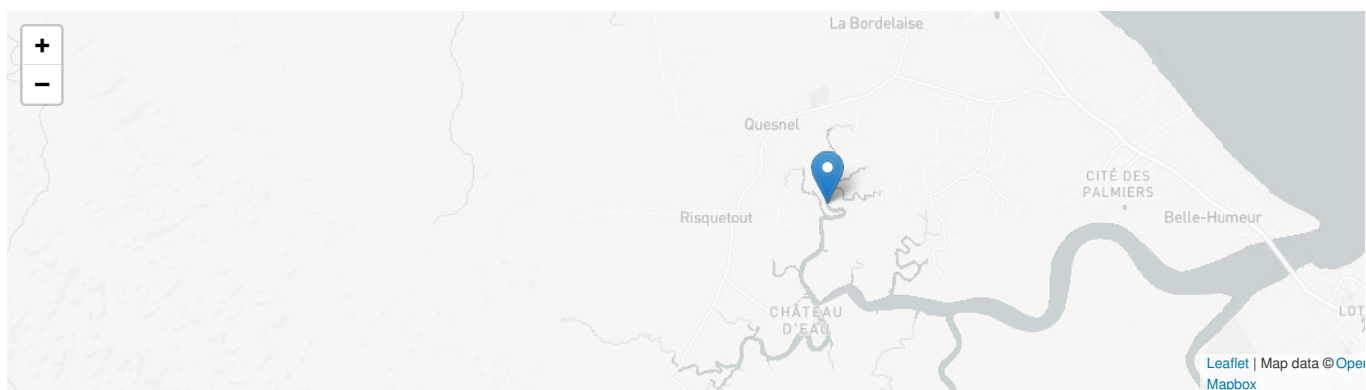

Date Export : 20230621041741