


Green Lighthouse

by Ida Bjørn-Mortensen / (1) 2015-06-22 09:17:31 / Internazionale / ⊚ 15248 / № EN

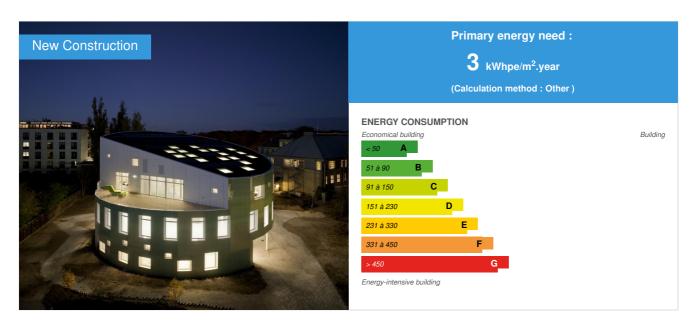

Building Type: Office building < 28m

Construction Year : 2009 Delivery year : 2009

Address 1 - street : 2200 KøBENHAVN N, Denmark

Climate zone: [Cfb] Marine Mild Winter, warm summer, no dry season.

Net Floor Area: 950 m² Other

Construction/refurbishment cost : 5 000 000 €

Number of Work station : 37 Work station

Cost/m2: 5263.16 €/m²

Certifications:





Proposed by :



General information

Green Lighthouse is Denmark's first public carbon-neutral building. The building has been built in less than a year in a close public/private partnership.

Green Lighthouse is an energy-efficient building of great architectural merit, with a high influx of daylight. Inspired by the sundial and the movement of the sun around the building, Green Lighthouse plays on the sun as a source of energy and on its role in science. As sustainable as it is healthy, Green Lighthouse relies on district heating, solar cells, solar heating and cooling, seasonal storage and innovative architecture to create a gorgeous, CO₂-neutral building.

The partners behind the building both from the public and the private sphere. They are the University of Copenhagen, VELUX, VELFAC, the Danish Building and Property Agency (UBST) and the City of Copenhagen.

See more details about this project

 $\begin{tabular}{ll} $ \mathbb{Z}^* http://www.velux.com/sustainable_living/demonstration_buildings/green_lighthouse \end{tabular}$

Stakeholders

Stakeholders

Function: Designer

Christensen & Co Architects

Michael Christensen

Function : Contractor Hellerup Byg

-

Function: Other consultancy agency

COWI

Peter Lawaetz

Energy design

Function: Others

Municipality of Copenhagen

Anne Skovbro

☑ http://www.kk.dk

Strategic Partner

Function: Others

University of Copenhagen

Lykke Friis

Strategic partner & Building Owner

Contracting method

Public Private Partnership

If you had to do it again?

We commissioned the first year into the turnkey contract, this was a good experience. For next projects, it should be commissioned for 3-5 years.

Building users opinion

Very good indoor climate, cf interviews made for "Green Buildings Pay" book written by Brian Edwards & Emanuele Naboni, ed. 3, Routledge

Energy

Energy consumption

Primary energy need: 3,00 kWhpe/m².year

Primary energy need for standard building : $60,00 \text{ kWhpe/m}^2$.year

Calculation method: Other

Breakdown for energy consumption: 14 heating;

8 lighting;

5 ventilation;

3 hot water;

27 production - solar thermal & PV

Envelope performance

Envelope U-Value: 0,08 W.m⁻².K⁻¹

More information:

prefabricated; thermoactive slabs ground and first floor

Building Compactness Coefficient: 0,60 Indicator: EN 13829 - n50 » (en 1/h-1)

Air Tightness Value : 0,74

☐ report from COWI consultants

Real final energy consumption

Real final energy consumption/m2: 44,00 kWhfe/m².year

Year of the real energy consumption: 2 010

Renewables & systems

Systems

Heating system:

- Urban network
- Heat pump
- Others
- Solar thermal

Hot water system :

- Urban network
- Heat pump
- Solar Thermal

Cooling system:

Solar cooling

Ventilation system :

- Natural ventilation
- Double flow heat exchanger

☑ WindowMaster control system

Renewable systems:

- Solar photovoltaic
- Solar Thermal
- Energy recovery from waste

Renewable energy production: 90,00 %

district heating in CPH is partly carbon-neutral

Other information on HVAC

heat pump from Sorttech, fluid/fluid, connected to the grid, and to a seasonal storage

Solutions enhancing nature free gains :

heat pump COP 1,6 on district heating

Smart Building

BMS :

Window Master system combined with BMS classic

Users' opinion on the Smart Building functions: Easy and adaptive - works from every work station

Environment

Urban environment

High density, inner urban Copenhagen

Land plot area: 1 000,00 m²
Built-up area: 20,00 %

Products

Product

Heat pump and seasonal storage and district heating in combination

Product category: Table 'c21_italy.innov_category' doesn't exist SELECT one.innov_category AS current,two.innov_category AS parentFROM innov_category AS oneINNER JOIN innov_category AS two ON one.parent_id = two.idWHERE one.state=1AND one.id = '0'

heat pump designed for solar cooling, used reverse; taking in hot water from the roof - solar thermal, by use of seasonal storage from summer to winter, and then adding the district heating. http://www.sortech.de/en/

worked well - only few problems with vacuum

Costs

Construction and exploitation costs

Cost of studies : 50 000 €

Total cost of the building : 5 000 000 €

Energy bill

Forecasted energy bill/year : 2 000,00 €

Real energy cost/m2: 2.11

Real energy cost/Work station: 54.05

Health and comfort

Indoor Air quality

Based on the relative comfort principle, according to EN 15 251. User is connected to outdoors visually, and also in terms of comfort. During winter, the IAQ is stable based on mechanical ventilation and heat exchange, during summer the users enjoy natural ventilation, combined with night cooling.

Comfort

Health & comfort: The architectural concept of the house is the sun dial; the house follows the sun, also by its window design, where the facade windows and exterior sunscreening follow the path of the sun. The users can follow the seasons changing, and adapt the indoor climate individually. The house is flooded with daylight on all floors, and there is a "cathedral effect" through the central atrium, where users benefit from a 2500+ lux experience, to benefit their well-being and productivity.

Calculated indoor CO2 concentration :

700 ppm

Measured indoor CO2 concentration:


650 ppm in average

Calculated thermal comfort: Class 2 in EN 15251


Carbon

GHG emissions

Building candidate in the category

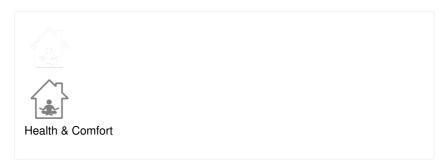



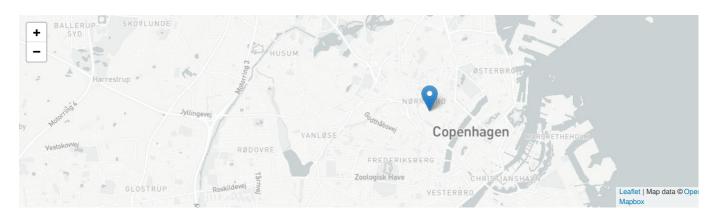

Date Export: 20230515143030